


150 Watts

CE-150 Series

Features

- Universal 85-264 VAC Input
- Harmonic Current per EN 61000-3-2
- Compact 4" X 7" X 1.75" Size
- Standard "U" Shaped Chassis
- Optional Perforated Cover
- Optional Remote On/Off
- Class B Conducted Emissions Per EN 55022,11
- EMC Compliant to EN 61000-4-2, 3, 4, 5, 6 & 11 and EN 60601-1-2
- Optional Power Fail Signal
- 2 Year Warranty
- EN 60950 ITE Certification
- EN 60601-1 Medical Cert.

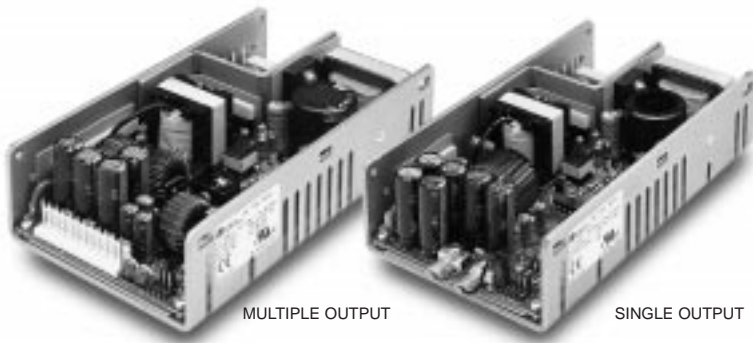

Safety Specifications

General	Protection Class:	I
	Voltage Category:	II
	Pollution Degree:	2
Underwriters Laboratories File E137708	UL1950 Third Edition UL2601-1 Second Edition CB Report per IEC 950 (1991) Second Edition, A1, A2, A3, A4 All EN 60950 Deviations CB Report Per IEC 601-1 (1988) First Edition A1, A2	
UL Recognition Mark For Canada File E137708	CAN/CSA-C22.2 No. 950-M95 CAN/CSA-C22.2 No. 601-1-M90	
TUV License B 98 05 30824 002	EN 60950/A4:1997 EN 60601-1/A2:1995	
	Low Voltage Directive	

Model Listing

MODEL	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
CE-150-4001	+3.3/15A	+5V/5A	+12V/2A	-12V/2A
CE-150-4002	+5V/15A	+3.3V/5A	+12V/2A	-12V/2A
CE-150-4003	+5V/15A	+3.3V/5A	+15V/2A	-15V/2A
CE-150-4004	+5V/15A	-5.2V/5A	+12V/2A	-12V/2A
CE-150-4005	+5V/15A	-5.2V/5A	+15V/2A	-15V/2A
CE-150-4006	+5V/15A	+12V/5A	+12V/2A	-12V/2A
CE-150-4007	+5V/15A	+12V/5A	+15V/2A	-15V/2A
CE-150-4101	+5V/15A	+24V/5A	+12V/2A	-12V/2A
CE-150-4102	+5V/15A	+24V/5A	+15V/2A	-15V/2A
CE-150-3001	+5V/15A	+12V/5A		-12V/2A
CE-150-3002	+5V/15A	+15V/5A		-15V/2A
CE-150-3003	+15V/5A	-15V/5A	+5V/2A	
CE-150-2001	+12V/7.5A	-12V/5A		
CE-150-2002	+15V/5A	-15V/5A		
CE-150-2003	+5V/15A	+12V/6A		
CE-150-2101	+5V/15A	+24V/5A		
CE-150-1001	3.3V/30A ⁽⁵⁾			
CE-150-1002	5V/30A ⁽⁵⁾			
CE-150-1003	12V/12.5A			
CE-150-1004	15V/10A			
CE-150-1005	24V/6.25A			
CE-150-1006	28V/5.4A			
CE-150-1007	48V/3.1A			

Refer to "Applications Information" on page 17.

All specifications are maximum at 25°C unless otherwise stated and are subject to change without notice.

Output Specifications

Total Output Power	100W Convection Cooled 125W Convection Cooled W/ 1 Sq. Ft. Baseplate 150W 300 LFM Forced Air
Output Voltage Centering	Output 1: ± 0.25% Output 2: ± 0.25% (X0XX) (All Outputs) Output 2: ± 3.0% (X1XX) 50% Load Output 3: ± 2.0% Output 4: ± 2.0%
Source Regulation	Outputs 1-4: 0.5%
Load Regulation	Output 1: 0.5% (0-100% Load Change) Output 2: 0.5% (X0XX Models, 0-100%) 3.0% (X1XX Models, 10-100%) Output 3-4: 2.0% (0-100% Load Change)
Cross Regulation	Output 2: 0.2% (X0XX) (Output 1 load) Output 2: 5.0% (X1XX) varied 50-100% Output 3-4: 2.0%
Output Voltage Adjust Span	Output 1-2: 95-105% (X0XX Models) Output 1: 95-105% (X1XX Models) Output 1: 85-105% (1001, 4001) Output 2: 85-105% (4002, 4003)
Resolution	1%
Output Noise	(Output under test at 100% rated load)
Source Freq.	Outputs 1-4: 0.5%
Switching Freq.	Outputs 1-4: 1%
Total (20MHz)	Outputs 1-4: 1%
Turn On Overshoot	None
Transient Response	Outputs 1-4
Voltage Dev.	5%
Recovery Time	500 µS
Load Change	50% To 100%
Output Overvoltage Protection (Optional)	Output 1: 110% To 150% Shuts down all outputs. Cycle input to restart
Output Overpower Protection	165 Watts Min., Outputs 1 and 2 Outputs cycle on/off, auto recovery
Output Overcurrent Protection	110% Min. Outputs 3 And 4
Hold Up Time	20 mS Min., 150W Output 120V Input
Start Up Time	3 Seconds

Input Specifications

Source Voltage	85 - 264 Volts AC
Frequency Range	47-63 Hz
Source Current	
True RMS	3A at 85V Input
Peak Inrush	30A
Peak Repetitive	4.25A at 85V Input
Harmonic Distortion	0.05
Efficiency	.68 -.80 (Varies by model)
Power Factor	0.90 (150 watts, 230V)

Environmental Specifications




Ambient Operating Temperature Range	0° C to +70° C
Derating	See Power Rating Chart
Ambient Storage Temperature Range	-40° C To +85° C
Temperature Coefficient	Outputs 1-4: 0.02%/°C
Vibration	MIL-STD-810E, Method 514.4 Category 1
Shock	Transit Drop per MIL-STD-810E Method 516.4 Procedure IV

General Specifications

Dielectric Strength	5656 VDC, Primary to Secondary, 1 Sec. 2121 VDC, Primary to Ground, 1 Sec. 500 VDC, Secondary to Ground, 1 Sec.
Leakage Current	<300 µA Earth Leakage Current <100 µA Patient Leakage Current
Remote On/Off (Optional)	Contact closure shuts off all outputs
Power Fail Signal (Optional)	Logic low with input power failure 10 mS minimum prior to output one dropping 1%
Remote Sense (Single Output Models Only)	250mV compensation of output cable losses
Mean-Time Between Failures	150,000 Hours min., MIL-HDBK-217F, 25° C, GB

Weight
2.0 Lbs.
Electromagnetic compatibility specifications located on page 17.

CE-150 Series Mechanical Specifications

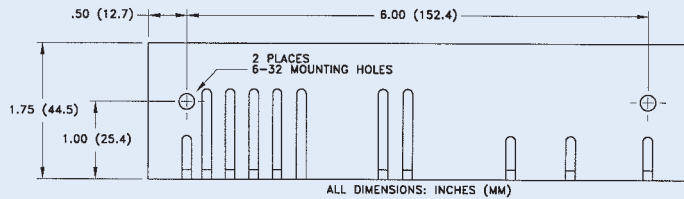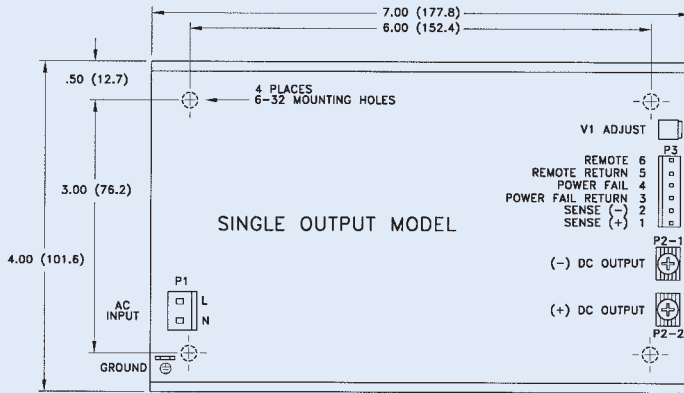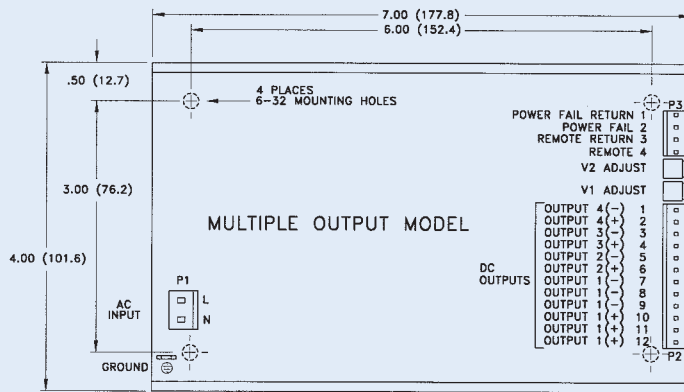

AC Input Connector P1:

- .156 inch friction lock header mates with Molex 09-50-3031 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

DC Output Connector P2: (Single Output)

- 6-32 screw down terminal mates with # 6 ring tongue terminal.

DC Output Connector P2: (Multi Output)

- .156 inch friction lock header mates with Molex 09-50-3121 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

Ground Connector Ⓧ:

- Ground mates with .187 inch quick disconnect terminal.

Option/Sense Connector P3: (Single Output)

- .100 inch friction lock header mates with Molex 22-01-2067 or equivalent crimp terminal housing with Molex type 6459 or equivalent crimp terminal.

Option/Sense Connector P3: (Multi Output)

- .100 inch friction lock header mates with Molex 22-01-2047 or equivalent crimp terminal housing with Molex type 6459 or equivalent crimp terminal.



Optional cover increases height dimension from 1.75 to 1.92 inches.

Electromagnetic Compatibility Specifications

Electrostatic Discharge	EN 61000-4-2	6kV Contact Discharge
Radiated Electromagnetic Field	EN 61000-4-3	3V/M, 26-1000 MHz
EFT/Bursts	EN 61000-4-4	2kV
Surges	EN 61000-4-5	1kV Differential Mode 2 kV Common Mode
Conducted Immunity	EN 61000-4-6	3V, 150KHz-80MHz
Voltage Dips	EN 61000-4-11	30% Reduction, 10mS 60% Reduction, 100mS
Voltage Interruptions	EN 61000-4-11	95% Reduction, 5000mS
Radiated Emissions	EN 55011	Class B
	EN 55022	Class B
Conducted Emissions	EN 55011	Class B
	EN 55022	Class B
Harmonic Current Emissions	EN 61000-3-2	

Applications Information

- Consult factory for alternate output configurations.
- Consult factory for positive, negative, or floating outputs.
- Specify optional overvoltage protection, remote on/off, power fail signal or cover when ordering.
- Each output can deliver its rated current but total output power must not exceed 100, 125 or 150 watts as determined by the cooling method.
- Rated 20 amps maximum when convection cooled only.
- Free air convection cooling, 100 watts maximum output power.
- Base plate cooled rating of 125 watts requires a one square foot .09" thick aluminum area attached to bottom four mounting holes.
- Forced air cooling rating of 150 watts requires an air speed of 300 linear feet per minute flowing past a point one inch above the main isolation transformer.
- This product is intended for use as a professionally installed component within medical and information technology equipment.
- A minimum load of 10% is required on output one to ensure proper regulation of remaining outputs.
- Remote sense terminals (Figure 1) may be used to compensate for cable losses up to 250mV (single output models only). The use of a twisted pair is recommended as well as a decoupling capacitor C_D (0.1-10 μ F) and a capacitor C_L of 100 μ F/Amp connected across the load side.
- Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- The input circuit includes only one fuse in the "line" conductor. In consideration to paragraph 57.6 of UL 2601-1, when used in medical applications, a fuse should be added to the "neutral" conductor in the end product.
- Maximum screw penetration into chassis mounting holes is .250 inches.

Maximum Output Power vs. Ambient Temperature

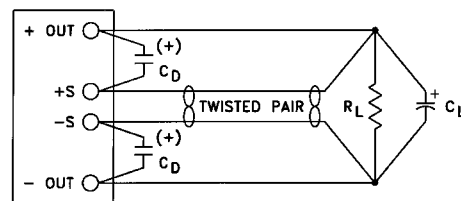
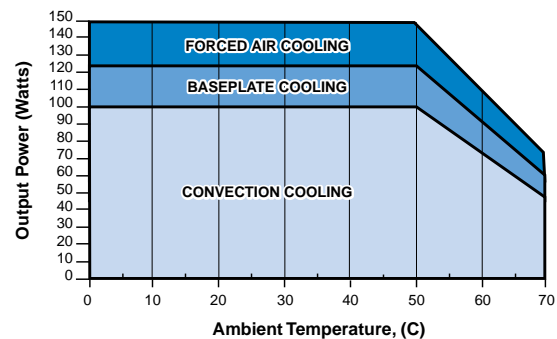


Figure 1 - Output sense connections