

# 65 Watts





## SRW-65 Series

### FEATURES

- Universal 85-264 VAC Input
- Compact 4" X 6" X 1.1" Size
- Class B Emissions Per EN 55022
- Over 150,000 Hours MTBF
- Open Frame or Optional Chassis and Cover
- 2 Year Warranty
- EN 60950 ITE Certification



### Safety Specifications

General	Protection Class: I
	Overvoltage Category: II
	Pollution Degree: 2
 Underwriters Laboratories File E137708	UL 1950, Third Edition
 UL recognition Mark for Canada File E137708	CAN/CSA-C22.2 No. 950-M95
 TUV License B 99 12 30824 009	EN 60950/All:1997
	Low Voltage Directive

### Model Listing

MODEL	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
SRW-65-4001	+5V/5A	-5V/3A	+12V/2A	-12V/2A
SRW-65-4002	+5V/5A	+12V/1A	+12V/2A	-12V/2A
SRW-65-4003	+5V/5A	+24V/1A	+12V/2A	-12V/2A
SRW-65-4004	+5V/5A	-5V/3A	+15V/2A	-15V/2A
SRW-65-4005	+5V/5A	+24V/1A	+12V/2A	-5V/2A
SRW-65-4006	+5V/5A	+24V/1A	+15V/2A	-15V/2A
SRW-65-4007	+5V/5A	+26V/1A	+15V/2A	-15V/2A
SRW-65-4008	+5V/5A	+24V/1A	+12V/2A	-12V/2A
SRW-65-4009	+5V/7.5A	+8V/1.25A	+15V/1A	-15V/1A
SRW-65-4103	+5V/5A	26V/1A	+12V/2A	-12V/2A
SRW-65-4104	+5V/4A	5V/1.25A	+15V/2.5A	24V/1.5A
SRW-65-3001	+5V/5A		+12V/3A	-12V/1A
SRW-65-3002	+5V/7A		+12V/2A	-12V/2A
SRW-65-3003	+5V/7A		+15V/2A	-15V/2A
SRW-65-3004	+5V/5A	-5V/4A	+12V/2A	
SRW-65-3005	+5V/5A	-5V/4A	+24V/1A	
SRW-65-3006	+5.25V/6A	+15V/1A	+34V/1.5A	
SRW-65-2001	+5V/7A			-5V/5A
SRW-65-2002	+5V/7A		+12V/3A	
SRW-65-2003	+12V/3A			-12V/2.5A
SRW-65-2004	+15V/2.5A			-15V/2A
SRW-65-2005	+5V/7A		+24V/1.5A	
SRW-65-2006	+5V/9A	+12V/2A		
SRW-65-2008 (5)	+6V/5A			-6V/5A
SRW-65-1001	5V/13A			
SRW-65-1002	12V/5.4A			
SRW-65-1003	15V/4.3A			
SRW-65-1004	24V/2.7A			
SRW-65-1005	18V/3.6A			
SRW-65-1006	24V/3.33A			
SRW-65-1105 (4)	21V/3.1A			

All specifications are maximum at 25°C unless otherwise stated and are subject to change without notice.

### Output Specifications

Total Output Power	65W	
Output Voltage Centering	Output 1: ± 1%	(All outputs at 50% rated load)
	Output 2: ± 5%	
	Output 3: ± 5%	
	Output 4: ± 5%	
Source Regulation	Outputs 1-4: 0.5%	
Load Regulation	Output 1: 1% (10-100% Load Change)	
	Output 2: 5% (20-80% Load Change)	
	Output 3: 5% (20-80% Load Change)	
	Output 4: 5% (20-80% Load Change)	
Cross Regulation	Output 2: 5.0%	(Output 1 load varied 50-100%)
	Output 3: 5.0%	
	Output 4: 5.0%	
Output Voltage Adjust Span	Output 1: 95% To 105%	
Resolution	1%	
Output Noise		
Source Freq.	Outputs 1-4: 0.5%	(Output under test at 100% rated load)
Switching Freq.	Outputs 1-4: 1%	
Total (20MHz)	Outputs 1-4: 1%	
Turn On Overshoot	None	
Transient Response	Outputs 1-4	
Voltage Deviation	5%	
Recovery Time	2mS	
Load Change	50% To 100%	
Output Overvoltage Protection (Optional)	Output 1: 110% To 150%	
Output Overpower Protection	110% Min., Outputs 1-4 Outputs cycle on/off, auto recovery	
Hold Up Time	16mS Min, 65W Output 120V Input	
Start Up Time	1 Second	

### Input Specifications

Source Voltage	85 - 264 Volts Continuous
Frequency Range	47-63 Hz.
Source Current	
True RMS	1.5A at 85V Input
Peak Inrush	40A
Efficiency	.72 - .80 (Varies by model)

### Environmental Specifications

Ambient Operating Temperature Range	0° C to +50° C
Storage Temperature Range	-40° C to +85° C
Temperature Coefficient	Outputs 1-4: 0.02%/C
Shock	Transit Drop per MIL-STD-810E Method 516.4 Procedure IV
Vibration	MIL-STD-810E, Method 514.4, Category 1
Conducted Emissions	EN 55022 Class B

### General Specifications


Dielectric Strength	4250 VDC, Primary to Secondary, 1 Sec. 2150 VDC, Primary to Ground, 1 Sec. 500 VDC, Secondary to Ground, 1 Sec.
Mean-Time Between Failures	150,000 Hours min., MIL-HDBK-217F, 25° C, GB
Power Fail Signal (Optional)	Logic low with input power failure, 2 mS minimum prior to output 1 dropping 1%
Weight Chassis and Cover	1.65 Lbs. 0.8 Lbs. Open Frame

### NOTES

1. Consult factory for alternate output configurations.
2. Consult factory for positive, negative, or floating outputs.
3. Specify optional overvoltage protection, power fail signal, chassis and cover when ordering.
4. UL, CUL only
5. TUV only

# SRW-65 Series Mechanical Specifications

## Open Frame

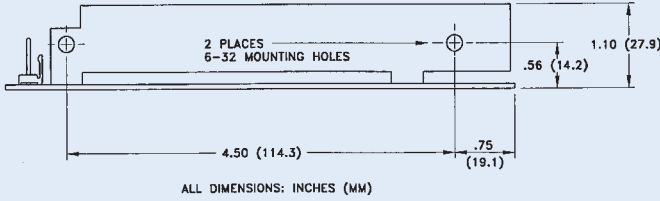

### AC Input and Ground Connector ⊕ TB1:


- .156 inch friction lock header mates with Molex 09-50-3051 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

### DC Output Connector TB2:



- .156 inch friction lock header mates with Molex 09-50-3101 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

### Option Connections:

- PF: Optional power fail signal
- G: Optional power fail signal return

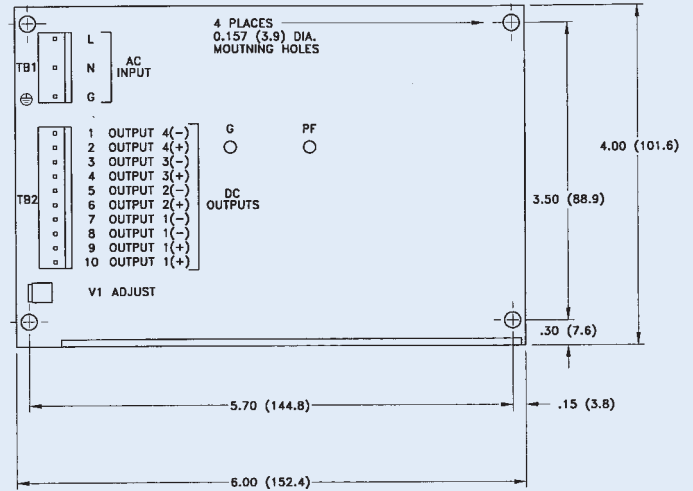

## Optional Chassis & Cover

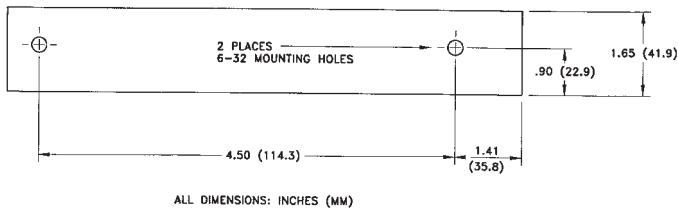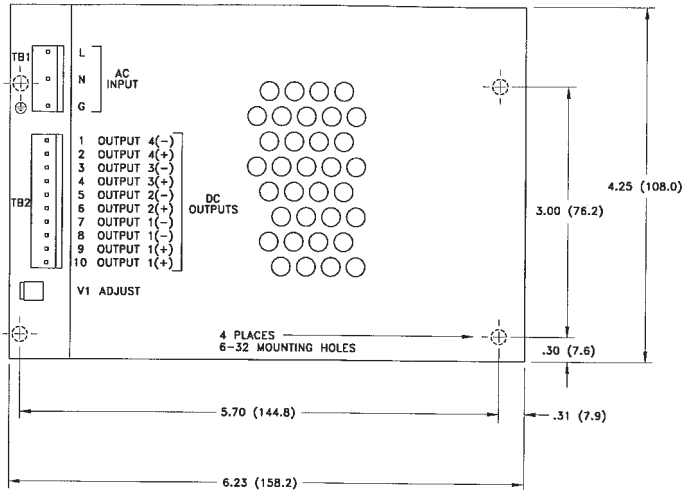

## Applications Information

- Maximum screw penetration into mounting holes is .25 inch.
- Each output can deliver its rated load but total output power must not exceed 65 watts.
- A minimum load of 20% is required on output one to insure proper regulation of remaining outputs.
- Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- This product is intended for use as a professionally installed component within information technology equipment.



Optional chassis/cover shown