

45 WATTS

GRN-45 MULTI OUTPUT AC-DC

FEATURES:

- RoHS Compliant
- 2 Year Warranty
- Advanced SMT Design
- <1W No Load Input Power
- 86% Peak Efficiency
- 85% Average Efficiency
- Excellent Light Load Efficiency
- Dual, Triple & Quad Outputs
- Compact 2.5" x 4.25" x 1.0" Size
- EN 60950-1 ITE Certification
- EN 60601-1 Medical Certification
- EN 61000-6-2 & EN 60601-1-2 EMC
- Optional Chassis/Cover



OPEN FRAME



CHASSIS/COVER

SAFETY SPECIFICATIONS

General	Protection Class: I
	Overvoltage Category: II
	Pollution Degree: 2
Underwriters Laboratories File E137708/E140259	UL 60950-1 Second Edition, 2007 UL 60601-1 First Edition, 2006 AAMI/ANSI ES6060-1, 2005
CB SCHEME	CB Reports/Certificates (including all National and Group Deviations) IEC 60950-1/A1:2009, Second Edition IEC 60601-1:1988 +A1:1991 +A2:1995 IEC 60601-1:2005 Third Edition
UL Recognition Mark for Canada File E137708/E140259	CAN/CSA-C22.2 No. 60950-1-07, Second Edition CAN/CSA-C22.2 No. 601-1-M90, 2005 CAN/CSA-C22.2 No. 60601-1:2008
TUV	EN 60950-1/A1:2010 EN 60601-1/A2:1995 EN 60601-1:2006
Low Voltage Directive RoHS Directive (Recast)	(2006/95/EC of December 2006) (2011/65/EU of June 2011)

MODEL LISTING

MODEL	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
GRN-45-4001	+3.3V/5.0A	+5.0V/5.0A	+12V/1.0A	-12V/1.0A
GRN-45-4002	+5.0V/5.0A	-5.0V/5.0A	+12V/1.0A	-12V/1.0A
GRN-45-4003	+5.0V/5.0A	+24V/1.0A	+12V/1.0A	-12V/1.0A
GRN-45-4004	+5.0V/5.0A	+24V/1.0A	+15V/1.0A	-15V/1.0A
GRN-45-3001	+5.0V/5.0A		+12V/1.0A	-12V/1.0A
GRN-45-3002	+5.0V/5.0A		+15V/1.0A	-15V/1.0A
GRN-45-2001	+5.0V/5.0A	+24V/1.0A		
GRN-45-2002	+5.0V/5.0A	+12V/2.0A		
GRN-45-2003	+12V/2.0A	-12V/2.0A		
GRN-45-2004	+15V/2.0A	-15V/2.0A		

ORDERING INFORMATION

Other output configurations available (consult factory) (15)

Please specify the following optional features when ordering:

CH - Chassis
CO - Cover
OVP - Overvoltage protection
I/O - Isolated outputs (consult factory)

All specifications are maximum at 25°C, 45W unless otherwise stated, may vary by model and are subject to change without notice.

GREEN MODE

OUTPUT SPECIFICATIONS

Output Power at 50°C	45W	85-264 V _{IN} (see derating chart)
Voltage Centering	Output 1: ±0.5% Outputs 2 - 4: ±5.0%	(All outputs at 50% load)
Voltage Adjust Range	Output 1: 95-105%	
Load Regulation	Output 1: ±0.5% Outputs 2 - 4: ±5.0%	(0-100% load change) (10-100% load change)
Source Regulation	Outputs 1 - 4: 0.5%	
Cross Regulation	Outputs 2 - 4: 5.0%	
Ripple & Noise	Outputs 1 - 4: 1.0%	
Turn On Overshoot	<1%	
Transient Response	Output recovers to within 1% of initial set point due to a 50% step load change, 500µS maximum, 4% maximum deviation.	
Overvoltage Protection	Latching, Output 1 between 110% and 150% of rated output voltage (optional)	
Overpower Protection	110%-160% rated P _{OUT} , cycle on/off, auto recovery	
Hold-Up Time	16 ms typical, full power, 115V input	
Start-Up Time	1 sec., 115/230V input	
Output Rise Time	25 ms typical	
Minimum Load ⁽²⁾	No minimum load required	

INPUT SPECIFICATIONS

Source Voltage	85 - 264 VAC (see derating chart)	
Frequency Range	47 - 63 Hz	
Input Protection ⁽⁶⁾	Internal 2A time delay fuse, 1500A breaking capacity	
Peak Inrush Current	50A max. at 230 V	
Peak Efficiency	86%	
Average Efficiency	85% (Avg. of 25%, 50%, 75%, and 100% rated load)	
Light Load Efficiency	85%, 115/230 V _{IN} , 33% power	
No Load Input Power	<1W, 115/230 V _{IN} , no load	

ENVIRONMENTAL SPECIFICATIONS

Cooling	Free air convection	
Ambient Operating	0° C to + 70° C	
Temperature Range	Derating: see power rating chart	
Ambient Storage Temp. Range	- 40° C to + 85° C	
Operating Relative Humidity Range	20-90% non-condensing	
Altitude	10,000 ft. ASL	Operating
	40,000 ft. ASL	Non-operating
Temperature Coefficient	0.02%/°C	
Vibration	2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each.	
Shock	20G, 11 ms, 3 axis, 3 each direction.	

GENERAL SPECIFICATIONS

Means of Protection		
Primary to Secondary	2MOPP (Means of Patient Protection)	
Primary to Ground	1MOPP (Means of Patient Protection)	
Secondary to Ground	Operational Insulation(Consult factory for 1MOOP or 1MOPP)	
Dielectric Strength ^(8,9)		
Reinforced Insulation	5656 VDC, primary to secondary, 1 sec.	
Basic Insulation	2545 VDC, primary to ground, 1 sec.	
Operational Insulation	707 VDC, secondary to ground, 1 sec.	

Leakage Current		
Earth Leakage	<300uA NC, <1000uA SFC	
Touch Current	<100uA NC, <500uA SFC	



Switching Frequency	100 KHz	
Mean-Time Between Failures	>400,000 hours, MIL-HDBK-217F, 25° C, GB	
Weight	0.48 lbs.	Open frame / 0.62 lbs. Chassis and cover

ELECTROMAGNETIC COMPATIBILITY SPECIFICATIONS



Electrostatic Discharge	EN 61000-4-2	± 6kV contact / ± 8kV air discharge
Radiated Electromagnetic Field	EN 61000-4-3	80-1000MHz, 1.0-2.7GHz 10V/m, 80%AM
EFT/Bursts	EN 61000-4-4	± 2 kV
Surges	EN 61000-4-5	± 2 kV line to earth / ± 1 kV line to line
Conducted Immunity	EN 61000-4-6	.15 to 80MHz, 10V, 80% AM
Magnetic Field Immunity	EN 61000-4-8	30A/m, 50/60 Hz.
Voltage Dips	EN 61000-4-11	95% dip, 10ms 30% dip, 100ms 60% reduction, 500 ms (Criteria B)
Voltage Interruptions	EN 61000-4-11	95% reduction, 5 sec.
Radiated Emissions	EN 55011/22, FCC Part 15	Class B
Conducted Emissions	EN 55011/22, FCC Part 15	Class B
Harmonic Current Emissions	EN 61000-3-2	Class A
Voltage Fluctuations and Flicker	EN 61000-3-3	Compliance

GRN-45 MULTI MECHANICAL SPECIFICATIONS

OPEN FRAME

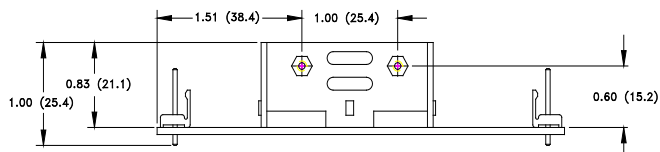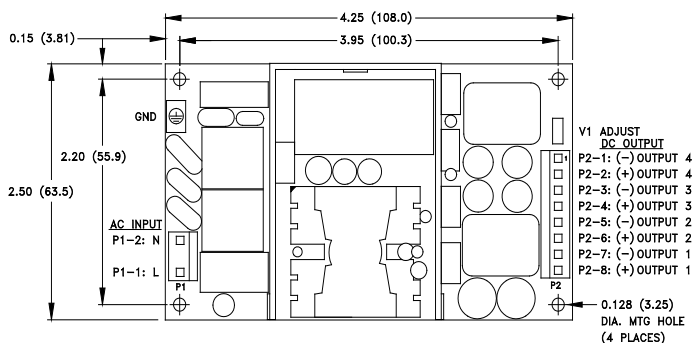


OPTIONAL CHASSIS/COVER

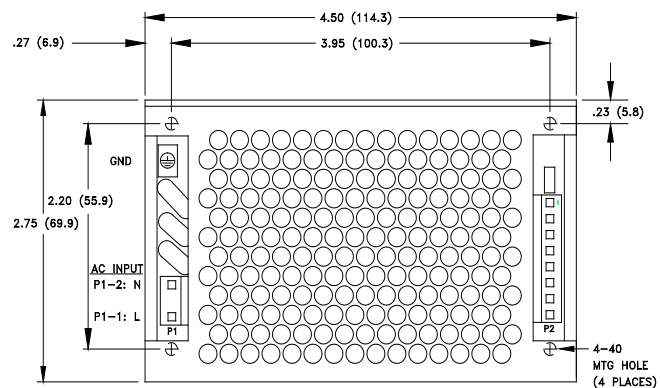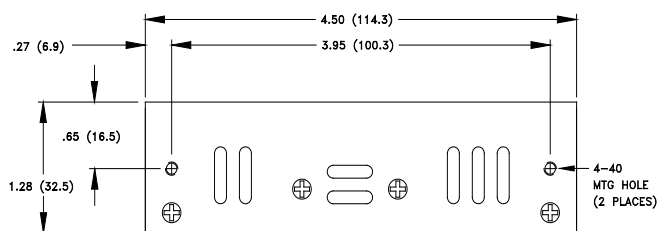


ALL DIMENSIONS IN INCHES (MM)

CONNECTOR SPECIFICATIONS



AC Input

.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3--640706-1 or equivalent crimp terminal.



DC Output

.156 friction lock header mates with Tyco 770849-8 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal.



Ground


.187 quick disconnect terminal

APPLICATIONS INFORMATION


- Each output can deliver its rated current but total continuous output power must not exceed 45 Watts.
- Minimum load is not required for reliable operation however a light load is required on output 1 when loading outputs 2, 3 or 4.
- Sufficient area must be provided around power supply to allow natural movement of air to develop in convection cooled applications.
- Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
- This product is intended for use as a professionally installed component within information technology, industrial and medical equipment and is not intended for stand alone operation.
- This product includes only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in neutral conductor of the end product.
- Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- This product was type tested and safety certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1ST Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- Maximum screw penetration into bottom chassis mounting holes is .100 inches.
- Maximum screw penetration into side chassis mounting holes is .188 inches.
- Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to operating instructions for additional information.
- To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/cover option is recommended.
- Optional Output Configuration (Consult factory)
 - V2 can be configured positive, negative or floating with respect to V1
 - V3 can be configured positive or floating with respect to V1 and must share a common return with V4
 - V4 can be configured negative or floating with respect to V1 and must share a common return with V3

TYPICAL EFFICIENCY vs. LOAD

(Model GRN-45-3001 Efficiency shown)

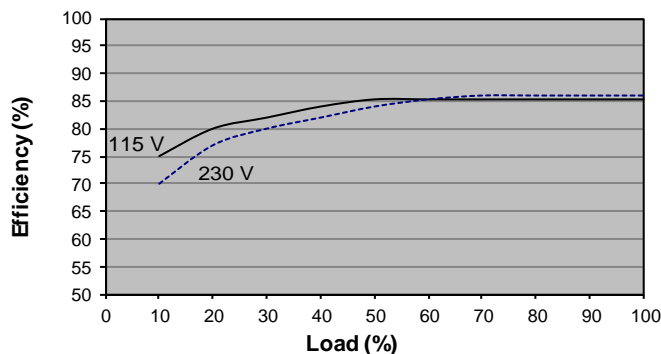

MAX P_{OUT} vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

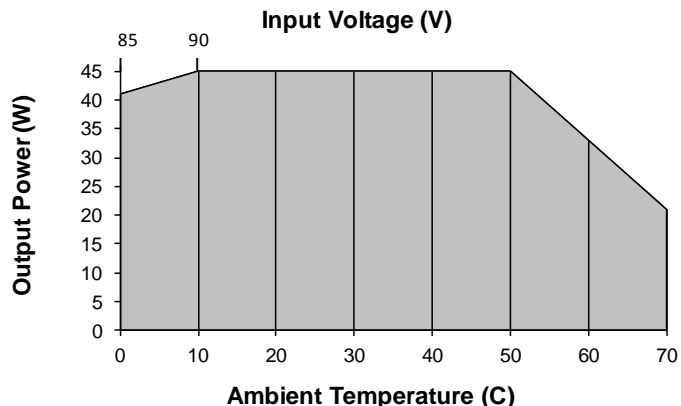

Derating requirements - Derate from 100% load at 50° C to 50% load at 70° C.
- Derate from 100% load at 90 V_{IN} to 90% load at 85 V_{IN}.