


# MB SERIES



## FEATURES AND SPECIFICATIONS

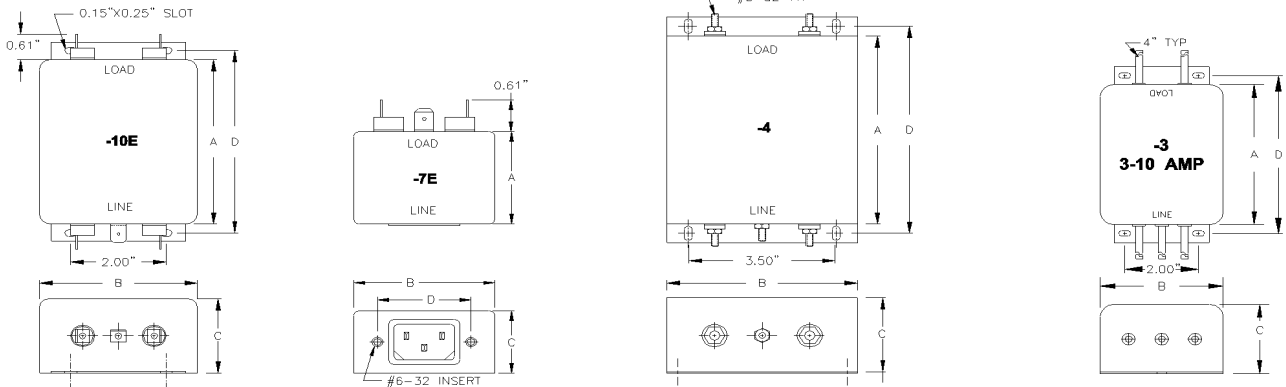

### SPECIFICATIONS

#### 1.0 HIGHPOT RATING:


**LINE-TO-GROUND: 2000 VAC**  
**LINE-TO-LINE: 1750 VDC**

#### 2.0 MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND.

**115 VAC, 60 Hz: 50uA MAX**  
**250 VAC, 60 Hz: 100uA MAX**

#### 3.0 PERFORMANCE

MHZ.		0.01	0.02	0.05	0.15	0.50	1.00	5.00	10.00	30.00
C/M	L/G	30 dB	35 dB	45 dB	65 dB	65 dB	60 dB	50 dB	50 dB	50 dB
D/M	L/L	25 dB	30 dB	45 dB	65 dB	65 dB	65 dB	60 dB	60 dB	60 dB

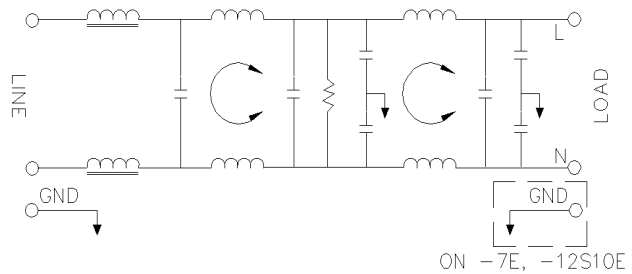

#### 4.0 RATED VOLTAGES AND FREQUENCY:

**115/250 VAC, 47-63 Hz**

#### 5.0 DIMENSIONS

PART NUMBER	RATED CURRENT	DIMENSIONS (INCHES)			
		A	B	C	D
MB3-3	3A	2.00	2.00	1.50	2.37
MB3-7E	3A	2.88	2.13	1.50	1.57
MB3-10E	3A	2.00	2.00	1.50	2.37
MB6-3	6A	3.87	3.31	1.75	4.30
MB6-7E	6A	3.87	3.31	1.75	4.30
MB6-10E	6A	3.87	3.31	1.75	4.30
MB10-3	10A	5.25	2.00	2.75	5.62
MB10-10E	10A	5.25	2.00	2.75	5.62
MB15-4	15A	5.00	4.50	2.00	5.50
MB20-4	20A	5.00	4.50	2.00	5.50

#### APPLICATIONS

- \* CE CERTIFICATION
- \* MACHINERY DIRECTIVE
- \* MEDICAL DIRECTIVE
- \* PROCESS CONTROL EQUIPMENT
- \* SURGE PROTECTION

#### FEATURES

- \* TVSS PROTECTION
- \* LOW LEAKAGE CURRENT
- \* SUPERIOR C/M AND D/M REJECTION
- \* CURRENT RATINGS 3-20 AMPS
- \* OTHER TERMINATIONS ARE AVAILABLE