

# EC4BE

## 10 WATT WIDE INPUT DC-DC CONVERTERS



### Features

- 10W Isolated Output
- Efficiency to 82%
- 2:1 Input Range
- Pi Input Filter
- Continuous Short Circuit Protection
- Meets EN55022 Class A, Conducted

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT MIN.	OUTPUT CURRENT MAX.	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	% EFF.	CASE
EC4BE01	9-18 VDC	5 VDC	100 mA	2000 mA	30 mA	1100 mA	76	B
EC4BE02		12 VDC	45 mA	830 mA	30 mA	1065 mA	78	
EC4BE03		15 VDC	35 mA	666 mA	30 mA	1065 mA	78	
EC4BE04		±12 VDC	±25 mA	±415 mA	40 mA	1065 mA	78	
EC4BE05		±15 VDC	±20 mA	±333 mA	40 mA	1065 mA	78	
EC4BE06		±5 VDC	±50 mA	±1000 mA	40 mA	1065 mA	78	
EC4BE11	18-36 VDC	5 VDC	100 mA	2000 mA	20 mA	535 mA	78	B
EC4BE12		12 VDC	45 mA	830 mA	20 mA	520 mA	80	
EC4BE13		15 VDC	35 mA	666 mA	20 mA	520 mA	80	
EC4BE14		±12 VDC	±25 mA	±415 mA	20 mA	520 mA	80	
EC4BE15		±15 VDC	±20 mA	±333 mA	20 mA	520 mA	80	
EC4BE16		±5 VDC	±50 mA	±1000 mA	20 mA	520 mA	80	
EC4BE21	36-72 VDC	5 VDC	100 mA	2000 mA	10 mA	260 mA	80	B
EC4BE22		12 VDC	45 mA	830 mA	10 mA	254 mA	82	
EC4BE23		15 VDC	35 mA	666 mA	10 mA	254 mA	82	
EC4BE24		±12 VDC	±25 mA	±415 mA	10 mA	254 mA	82	
EC4BE25		±15 VDC	±20 mA	±333 mA	10 mA	254 mA	82	
EC4BE26		±5 VDC	±50 mA	±1000 mA	10 mA	254 mA	82	

NOTE: 1. Nominal Input Voltage 12, 24 or 48 VDC

### Specifications

#### INPUT SPECIFICATIONS:

Input Voltage Range.....	12V .....	9-18V
	24V .....	18-36V
	48V .....	36-72V
Input Filter.....		PI Type

#### OUTPUT SPECIFICATIONS:

Voltage Accuracy		
Single Output.....		±1.0% max.
Dual + Output.....		±1.0% max.
Dual - Output.....		±1.0% max.
Voltage Balance (Dual).....		±1.0% max.
Transient Response		
Single 25% Step Load Change.....		<500µ sec.
Dual FL-1/2L ±1% Error Band.....		<500µ sec.
Ripple and Noise, 20MHz BW.....		100mV p-p max.
Temperature Coefficient.....		±0.02%/°C max.
Short Circuit Protection.....		Continuous
Line Regulation <sup>1</sup> Single/Dual Output.....		±0.2% max.
Load Regulation <sup>2</sup> Single/Dual Output.....		±1.0% max.

#### GENERAL SPECIFICATIONS:


Efficiency.....	See Table
Isolation Voltage.....	500 VDC min.
Isolation Resistance.....	10 <sup>9</sup> ohms
Switching Frequency.....	200KHz, min.
Operating Temperature Range.....	-25°C to + 71°C
Case Temperature.....	100°C max.
Cooling.....	Free-Air Convection
Storage Temperature Range.....	-40°C to + 100°C
EMI/RFI.....	Six sided Continuous Shield
Dimensions.....	2 x 1 x 0.4 inches (50.8 x 25.4 x 10.2 mm)
Case Material.....	Black Coated Copper with Non-Conductive Base
Weight.....	0.33g

#### NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 1/4 Load
3. A Minimum Load On the Output is Necessary to Maintain Regulation

### CASE B

All Dimensions In Inches(mm)  
Tolerance .xx= ±.04, .xxx= ±.010

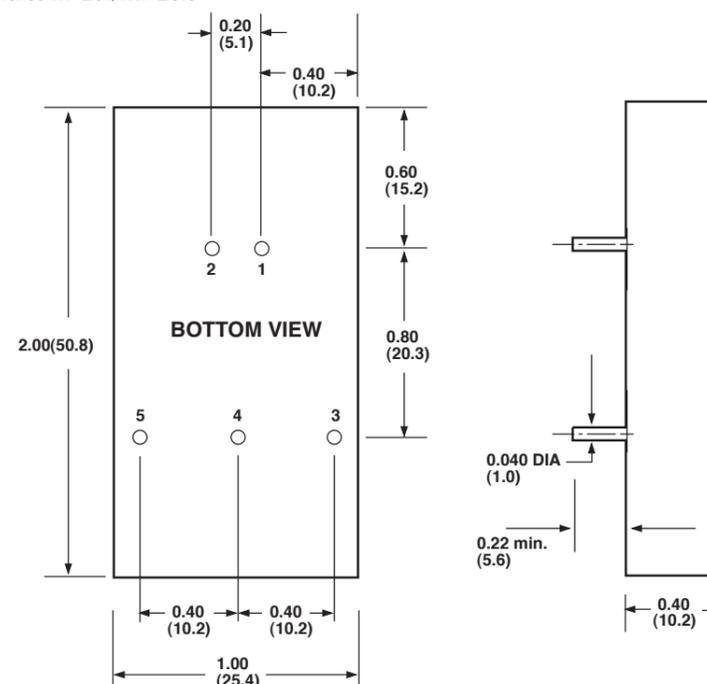

#### PIN CONNECTION

Pin	Function
1.	+ Input
2.	- Input
3.	+ Output
4.	Common/NP
5.	- Output

NP\*-NO PIN ON SINGLE OUTPUT