



HOME

ABOUT US

NEWS

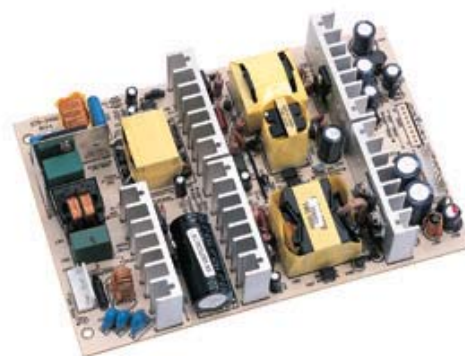
INQUIRY FORM

CONTACT US

AC-DC adapter Charger

Open Frame

OPEN FRAME CUSTOMER DESIGN

**FEATURE**

Input Voltage	100~240V/50~60Hz, 2A max.
Range voltage	90~264Vac/47~63Hz
Output Power	144 Watts-149Watts
Output Rating	5Vstb/1 A, 12V/4A, 24V/4A or 12V/7A
Leakage Current	Less than 3.5 mA
Withstanding Voltage	3000 Vac (between Input & Output)
Insulation Resistor	10Mn DC 500V (between Input& Output)
Efficiency	80% Typical
Protection	Short Circuit Protection; Over Voltage Protection
DIMENSIONS	180(L)x120(W)x33(H)mm

APPLICATION

Application	LCD Television
-------------	----------------

ENVIRONMENTAL

Operating Temperature	0~+40C
Storage Temperature	-20~+60C
Relative Humidity	(operating) 20~80% RH / (storage) 10~90% RH

RULE OF THE MODEL NAME

Model Name	O/P Voltage(V)	O/P Current(A)	PO(W)	Inlet
STD-2406	12/24	4/4	144	3Pin
STD-2407	5/12/24	1/4/4	149	3Pin
STD-2408	5/12/12	1/4/7	137	3Pin

Copyright © 2007 Adapter Technology Co., Ltd.. All Rights Reserved