

# 115 Watts





## SRW-115 Series

### Features

- Universal 85-264 VAC Input
- Compact 4.25" X 7" X 1.25" Size
- Class B Emissions Per EN 55022
- Over 150,000 Hours MTBF
- Open Frame or Optional Chassis and Cover
- 2 Year Warranty
- EN 60950 ITE Certification



### Safety Specifications

General	Protection Class:	I
	Overvoltage Category:	II
	Pollution Degree:	2
 Underwriters Laboratories File E137708	UL 1950 Third Edition	
 UL Recognition Mark For Canada File E137708	CAN/CSA-C22.2 No. 950-M95	
 TUV License B 99 12 30824 012	EN 60950/All:1997 VDE 0805	
	Low Voltage Directive	
	CB Report per IEC 950 (1991) Second Edition, A1, A2, and all national deviations	

### Model Listing

MODEL	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4
SRW-115-4001	+5V/12A	-5V/4A	+12V/4A	-12V/2A
SRW-115-4002	+5V/12A	+24V/1A	+12V/4A	-12V/2A
SRW-115-4003	+5V/12A	-5V/4A	+15V/3A	-15V/2A
SRW-115-4004	+5V/12A	+24V/1A	+15V/3A	-15V/2A
SRW-115-4005	+5V/12A	+12V/1A	+24V/3A	-12V/1A
SRW-115-4006	+5V/12A	+12V/3A	+15V/2A	-15V/2A
SRW-115-4007 (4)	+5V/12A	+12V/2.5A	+24V/2A	-5V/1A
SRW-115-4008 (4)	+24V/2A	+5V/3A	+5V/2A	-24V/2A
SRW-115-4011	+5V/5A	+15V/1A	+24V/5A	-15V/1A
SRW-115-4013	+5V/13A	+5V/5A	+12V/3A	-5V/3A
SRW-115-4012 (4)	+5V/5A	+12V/1A	+12V/3A	-12V/1A
SRW-115-4014	+3.3V/12A	+5V/4A	+15V/3A	-15V/2A
SRW-115-4015	+3.3V/12A	+5V/4A	+12V/4A	-12V/2A
SRW-115-4016 (5)	+5.2V/12A	+12V/4A	-12V/2A	-2V/9A
SRW-115-4017	5V/8A	19V/1A	19V/2A	54.5V/5A
SRW-115-3001	+5V/12A		+12V/4A	-12V/2A
SRW-115-3002	+5V/12A		+15V/4A	-15V/2A
SRW-115-3003	+5V/12A		+24V/3A	-12V/1A
SRW-115-3004 (5)	+5V/12A	+24V/1A	+12V/6A	
SRW-115-3005 (5)	+15V/3A	+15V/2A	+24V/2A	
SRW-115-2001	+5V/12A		+24V/3A	
SRW-115-2002	+12V/5A			-12V/5A
SRW-115-2003	+15V/5A			-15V/5A
SRW-115-2004	+24V/2.5A			-24V/2.5A
SRW-115-2005	+5V/12A		+15V/5A	
SRW-115-2006	+5V/12A		+12V/5A	
SRW-115-2007	+17V/3.4A			-17V/3.4A
SRW-115-2008	+9.25V/6A			-9.25V/6A
SRW-115-2010	+7.5V/10A			-7.5V/6A
SRW-115-2011 (4)	+28V/2A			-28V/2A
SRW-115-2012	+12V/8A			12V/2A

All specifications are maximum at 25°C unless otherwise stated and are subject to change without notice.

### Output Specifications

Total Output Power	115W	
Output Voltage Centering	Output 1: ±1% Output 2: ±5% Output 3: ±5% Output 4: ±5%	(All outputs at 50% rated load)
Source Regulation	Outputs 1-4: 0.5%	
Load Regulation	Output 1: 1% (10-100% Load Change) Output 2: 5% (10-100% Load Change) Output 3: 5% (10-100% Load Change) Output 4: 5% (10-100% Load Change)	
Cross Regulation	Output 2: 5.0% Output 3: 5.0% Output 4: 5.0%	(Output 1 Load Varied 50-100%)
Output Voltage Adjust Span Resolution	Output 1: 95% To 105% 1%	
Output Noise	Source Freq. Outputs 1-4: 0.5% Switching Freq. Outputs 1-4: 1% Total (20MHz) Outputs 1-4: 1%	(Output under test at 100% rated load)
Hold Up Time	16mS Min, 115W Output 120V Input	
Start Up Time	1 Second	

### Input Specifications

Source Voltage	85 - 264 Volts Continuous	
Frequency Range	47-63 Hz	
Source Current	True RMS 3.5A at 85V Input Peak Inrush 40A	
Efficiency	.72-.80 (Varies by model)	
Turn On Overshoot	None	
Transient Response	Outputs 1-4	
Voltage Deviation	5%	
Recovery Time	2mS	
Load Change	50% To 100%	
Output Overvoltage Protection (Optional)	Output 1: 110-150%	
Output Overpower Protection	110% min., outputs 1-4, Outputs cycle on/off, auto recovery	

### Environmental Specifications

Ambient Operating Temperature Range	0° C to +50° C	
Storage Temperature Range	-40° C To +85° C	
Temperature Coefficient	Outputs 1-4: 0.02%/°C	
Shock	Transit drop per MIL-STD-810E Method 516.4 Procedure IV	
Vibration	MIL-STD-810E, Method 514.4 Category 1	
Conducted Emissions	EN 55022 Class B	


### General Specifications

Dielectric Strength	4250 VDC, Primary to Secondary, 1 Sec. 2150 VDC, Primary to Ground, 1 Sec. 500 VDC, Secondary to Ground, 1 Sec.	
Power Fail Signal (Optional)	Logic low with input power failure, 2 mS minimum prior to output 1 drooping 1%	
Mean-Time Between Failures	150,000 Hours min., MIL-HDBK-217F, 25° C, GB	
Weight		2.25 Lbs.
Chassis and cover	1.30 Lbs. Open frame	

#### NOTES:

1. Consult factory for alternate output configurations.
2. Consult factory for positive, negative, or floating outputs.
3. Specify optional overvoltage protection, power fail signal, chassis or cover when ordering.
4. UL, CUL, only.
5. TUV only.

Open Frame

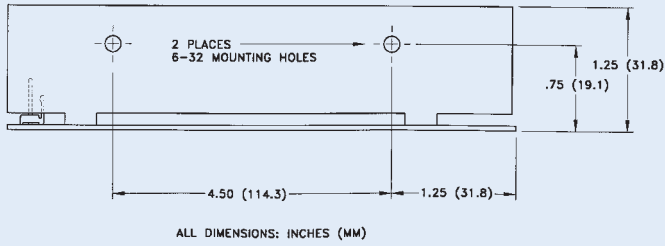

AC Input and Ground Connector TB1:


- .156 inch friction lock header mates with Molex 09-50-3051 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

DC Output Connector TB2:



- .156 inch friction lock header mates with Molex 09-50-3101 or equivalent crimp terminal housing with Molex 08-50-0189 or equivalent crimp terminal.

Power Fail Connectors:

- PF: Power fail signal
- TB2-7,8: Power fail signal return

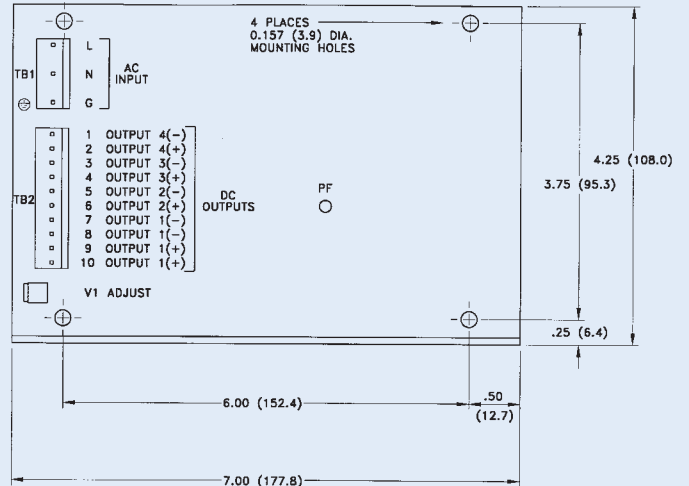

Optional Chassis & Cover

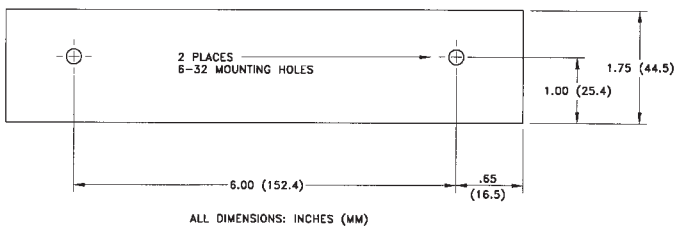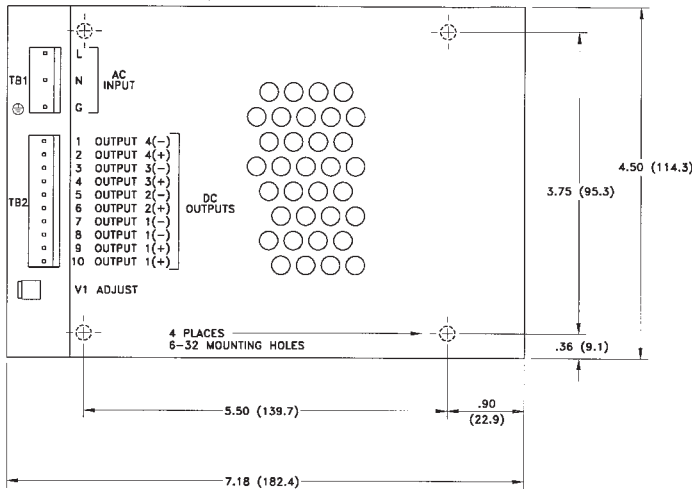

Applications Information

1. Maximum screw penetration into mounting holes is .25 inch.
2. Each output can deliver its rated load but total output power must not exceed 115 watts.
3. A minimum load of 20% is required on output one to insure proper regulation of remaining outputs.
4. Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
5. This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
6. This product is intended for use as a professionally installed component within information technology equipment.



Optional chassis/cover shown